







# Three Phase String Inverter

SUN-4/5/6/7/8/10/12/15K-G06P3-EU-AM2-P1

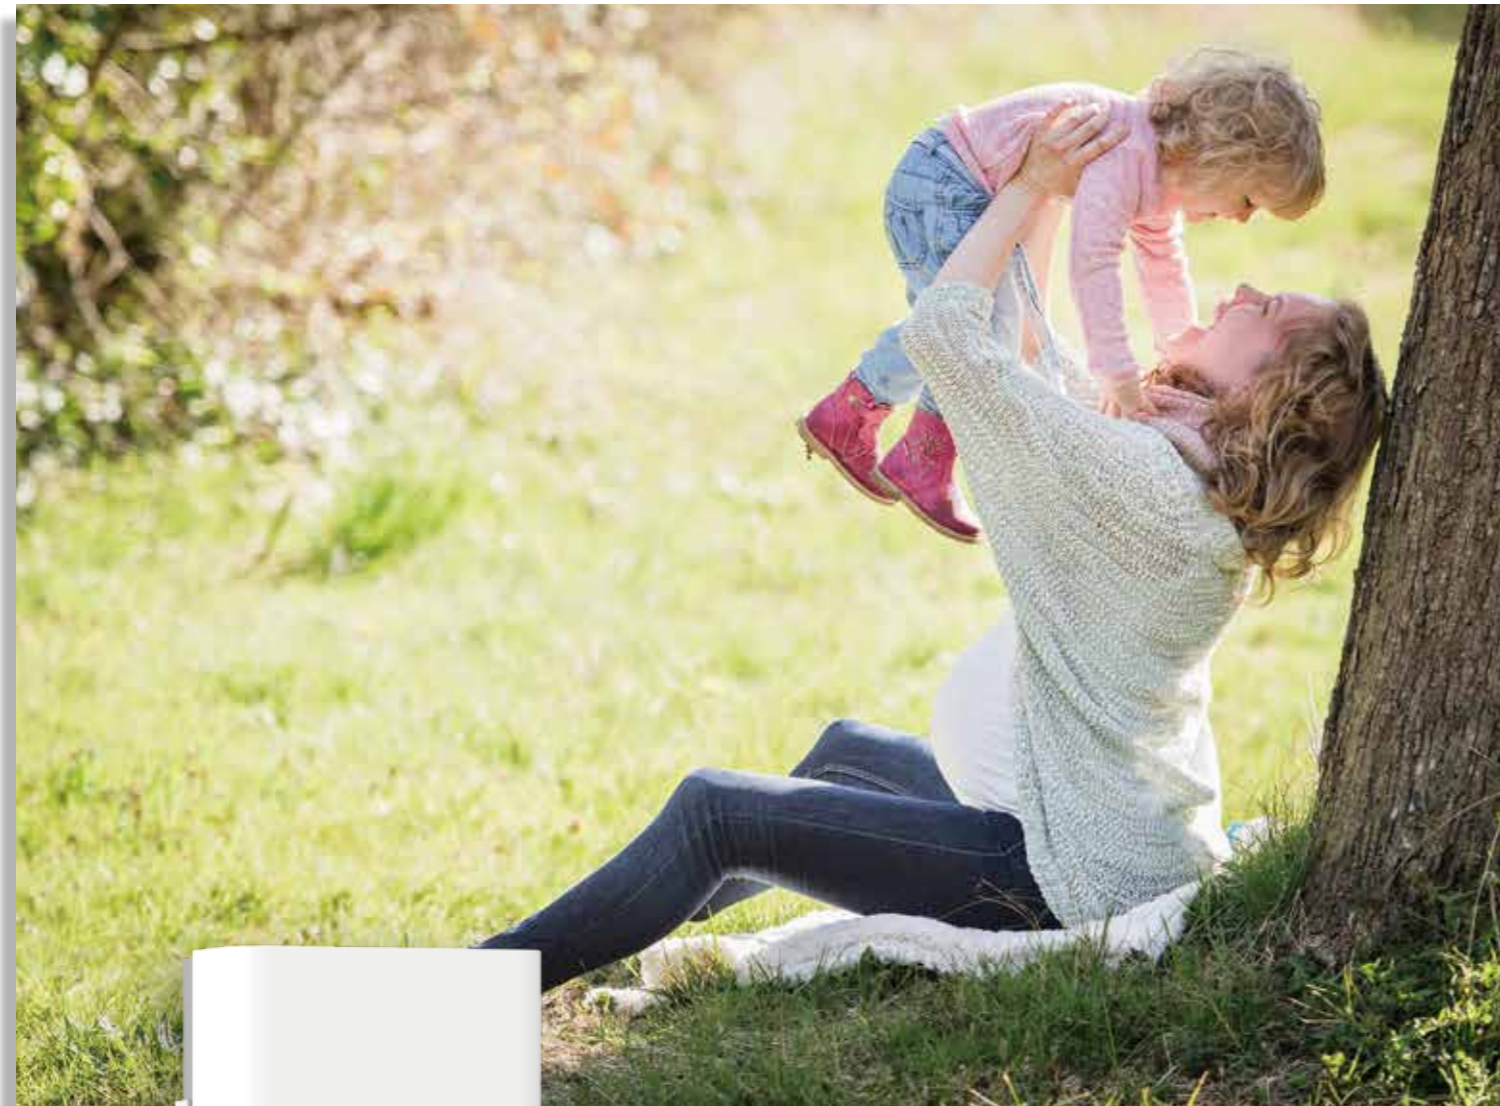

-  2 MPP trackers, Max. efficiency up to 98.5%
-  Zero export application, VSG application
-  String intelligent monitoring (optional)
-  Wide output voltage range
-  Anti-PID function (Optional)

## Technical Data

Model	SUN-4K-G06P3 -EU-AM2-P1	SUN-5K-G06P3 -EU-AM2-P1	SUN-6K-G06P3 -EU-AM2-P1	SUN-7K-G06P3 -EU-AM2-P1	SUN-8K-G06P3 -EU-AM2-P1	SUN-10K-G06P3 -EU-AM2-P1	SUN-12K-G06P3 -EU-AM2-P1	SUN-15K-G06P3 -EU-AM2-P1
<b>PV String Input Data</b>								
Max. PV Input Power (kW)	5.2	6.5	7.8	9.1	10.4	13	15.6	19.5
Max. PV Input Voltage (V)	1100							
Start-up Voltage (V)	140							
MPPT Voltage Range (V)	120-1000							
Rated PV Input Voltage (V)	600							
Max. Operating PV Input Current (A)	20+20						20+26	
Max. Input Short Circuit Current (A)	30+30						30+39	
No. of MPP Trackers/ No. of Strings per MPP Tracker	2/1+1						2/1+2	
<b>AC Output Side</b>								
Rated AC Output Active Power (kW)	4	5	6	7	8	10	12	15
Max. AC Output Apparent Power (kVA)	4.4	5.5	6.6	7.7	8.8	11	13.2	16.5
Rated AC Output Current (A)	6.1/5.8	7.6/7.3	9.1/8.7	10.7/10.2	12.2/11.6	15.2/14.5	18.2/17.4	22.8/21.8
Max. AC Output Current (A)	6.7/6.4	8.4/8	10/9.6	11.7/11.2	13.4/12.8	16.7/16	20/19.2	25/24
Rated Output Voltage/Range (V)	220/380V, 230/400V 0.85Un-1.1Un							
Grid Connection Form	3L/N/PE							
Rated Output Grid Frequency/Range(Hz)	50/45-55, 60/55-65							
Power Factor Adjustment Range	0.8 leading to 0.8 lagging							
Total Current Harmonic Distortion THDi	<3%							
DC Injection Current	<0.5In							
<b>Efficiency</b>								
Max. Efficiency	98.1%	98.2%			98.3%			98.5%
Euro Efficiency	97.5%	97.6%			97.8%			98%
MPPT Efficiency	>99%							
<b>Equipment Protection</b>								
DC Polarity Reverse Connection Protection	Yes							
AC Output Overcurrent Protection	Yes							
AC Output Overvoltage Protection	Yes							
AC Output Short Circuit Protection	Yes							
Thermal Protection	Yes							
DC Terminal Insulation Impedance Monitoring	Yes							
DC Component Monitoring	Yes							
Ground Fault Current Monitoring	Yes							
Power Network Monitoring	Yes							
Island Protection Monitoring	Yes							
Earth Fault Detection	Yes							
Overvoltage Load Drop Protection	Yes							
Residual Current (RCD) Detection	Yes							
Surge Protection Level	TYPE II(DC), TYPE II(AC)							
<b>Interface</b>								
Communication Interface	RS485/RS232							
Monitor Mode	GPRS/WIFI/Bluetooth/4G/LAN(optional)							
<b>General Data</b>								
Operating Temperature Range (°C)	-25 to +60°C, >45°C Derating							
Permissible Ambient Humidity	0-100%							
Permissible Altitude (m)	4000m							
Noise (dB)	<45							
Ingress Protection(IP) Rating	IP 65							
Inverter Topology	Non-Isolated							
Over Voltage Category	OVC II(DC), OVC III(AC)							
Cabinet Size (WxHxD mm)	283x463x178 (Excluding Connectors and Brackets)							
Weight (kg)	11							
Warranty	5 Years							
Type of Cooling	Natural Cooling							Intelligent Air Cooling
Grid Regulation	IEC 61727, IEC 62116, EN 50549							
Safety EMC/Standard	IEC/EN 61000-6-1/2/3/4, IEC/EN 62109-1, IEC/EN 62109-2							